

JP8 Reformation for Combat Vehicles


Funding Source: U.S. Army Tank Automotive Research, Development and Engineering Center (TARDEC)

Objectives:

- Reduce sulfur content in raw JP8 fuel to less than 1 ppmw
- Demonstrate successful system integration by reforming desulfurized product to generate hydrogen at 10 kWe rate

Key Technology Development:

1. Hydrodesulfurization (HDS) system
Reduce sulfur content to < 10ppmw
2. Sulfur Polishing
Reduce sulfur content to < 1 ppmw
3. Fuel Reformer
Sustained, stable operation using HDS product

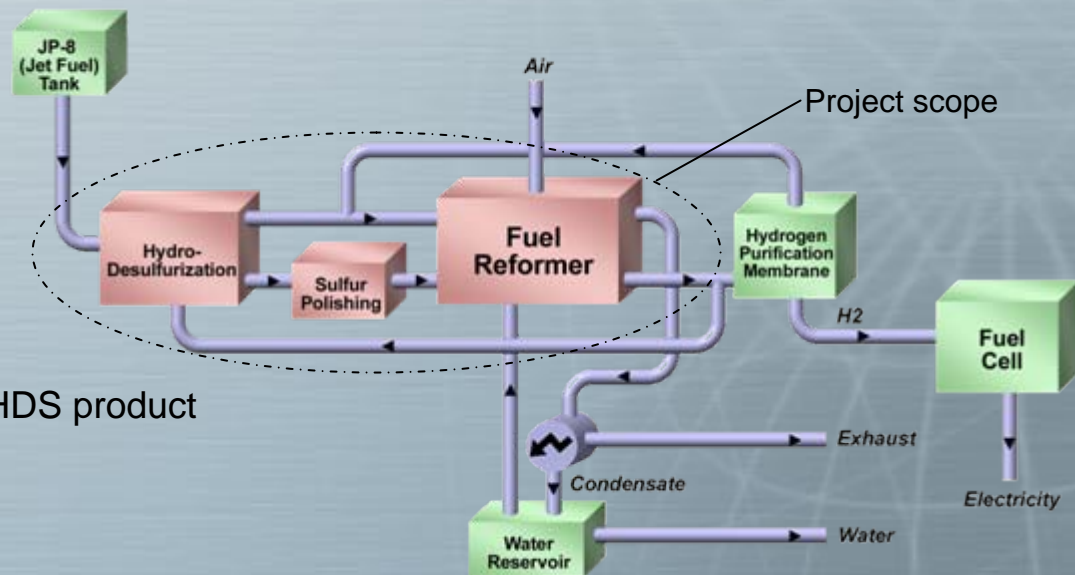

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 07 AUG 2007		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE JP8 Reformation for Combat Vehicles				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army RDECOM-TARDEC 6501 E 11 Mile Rd Warren, MI 48397-5000				8. PERFORMING ORGANIZATION REPORT NUMBER 17517	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S) TACOM/TARDEC	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) 17517	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES Presented at the NDIA 2nd Annual Ground-Automotive Power and Energy Conference, 7-9 August 2007, Troy, MI USA, The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

JP8 Reformation for Combat Vehicles

Funding Source: U.S. Army Tank Automotive Research, Development and Engineering Center (TARDEC)

Conventional Hydrodesulfurization (HDS):

- Large scale, three-phase refinery process employing a catalyst, a liquid phase (fuel), and a gas phase (hydrogen) at elevated pressures.
- Trickle-bed configuration is difficult to model and scale down—not practical for small scale systems.

Key Benefits of Integrated HDS/Reformer System:


- *Compatibility:*
Direct utilization of reformat from the reformer eliminates the need for a separate H₂ source.
- *Process Intensity:*
Higher space velocity due to gas-phase fuel and low operating pressures.
- *Efficiency:*
Light gases output from HDS reactor are used to fuel the reformer.

JP8 Reformation for Combat Vehicles



Funding Source: U.S. Army Tank Automotive Research, Development and Engineering Center (TARDEC)

Current Technology Status:

- Integrated desulfurization/reforming system successfully demonstrated
 - 10 kWe-scale JP-8 desulfurization subsystem
 - 1 kWe-scale JP-8 reformer
 - 500 ppmw raw sulfur content
 - Sub-0.3 ppmw sulfur in product
- Process stable over range of operating conditions
- Polishing step not required
 - 1 ppmw target achieved by HDS alone

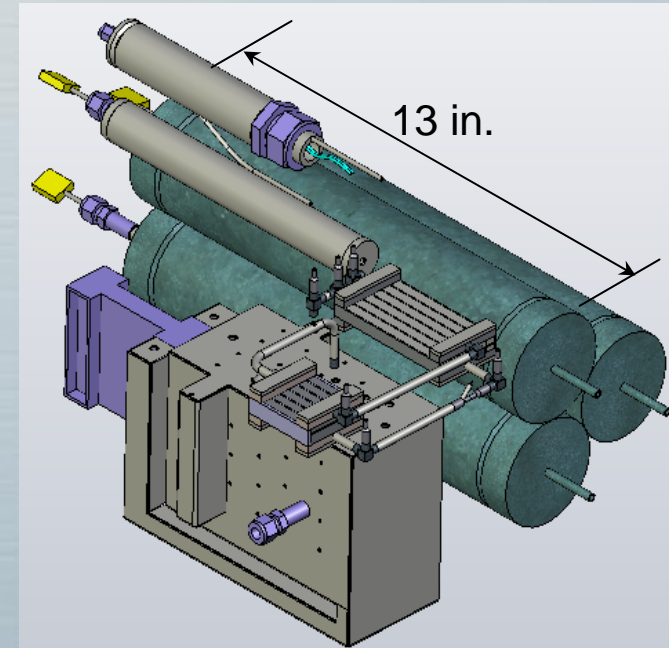

JP-8 Gas Chromatographs:

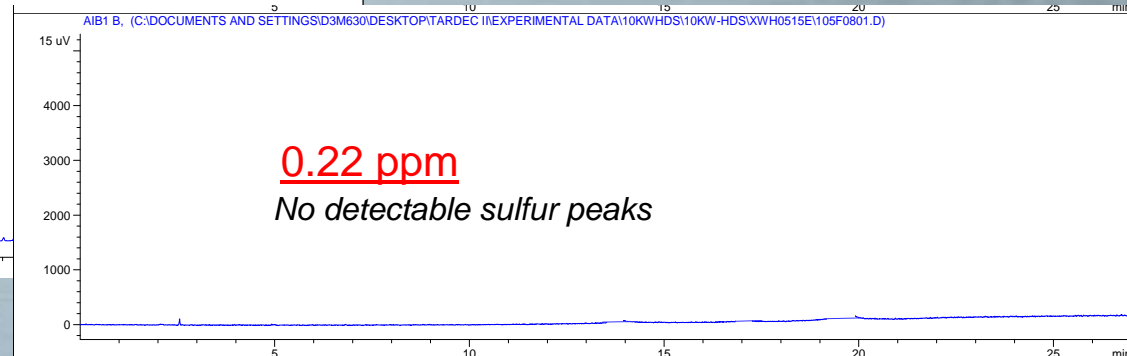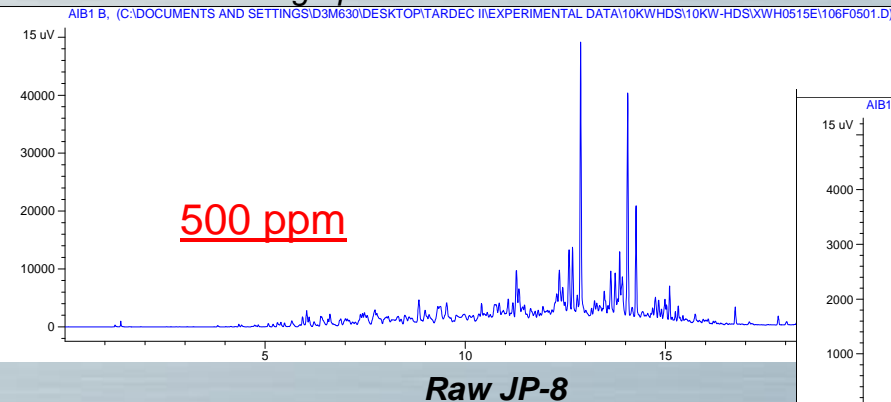

JP8 Reformation for Combat Vehicles

Funding Source: U.S. Army Tank Automotive Research, Development and Engineering Center (TARDEC)

Ongoing Work (current project):

- Build full-scale 10 kWe reformer with integrated HDS system
- Conduct 300-hour system demonstration

Future Work (potential TARDEC option effort):

- Expand capability to high-sulfur JP-8 (3,000 ppmw)
- Improve system integration
- Reduced startup time (30 min.)
- Conduct 1,000-hour system demonstration

Related Work (Battelle)

- Modify technology to address road diesel (S15; <15 ppmw)
- Develop flex-fuel capability of the Battelle fuel cell power system